






# multi•mount™

## s t a n d o f f s y s t e m

Hybrid Range		Standard Sizes		Nominal Dimensions
<b>Small</b>	<b>Medium</b>	<b>Large</b>	<b>XL</b>	
				
15mm = 1/2"	20mm = 5/8"	25mm = 1"	25mm = 1"	
12.7mm = 1/2"	15.88mm = 5/8"	19.05mm = 3/4"	19.05mm = 3/4"	

This range has clear gloss resin A and B parts and C parts selected from the options featured in Ranges/Hybrid on this website. Clear gloss resin D parts can also be used.

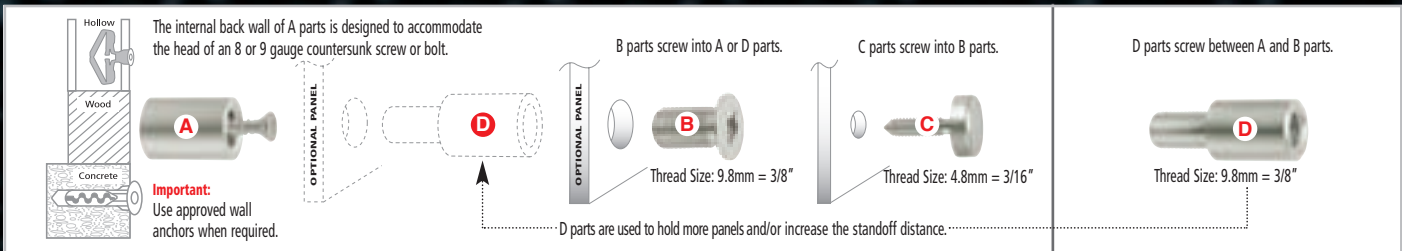

PART ▶	Maximum Loads and Widths				Optional Extra Parts ◉	
	RESIN B PARTS		C PARTS		RESIN D PARTS	
SIZE ▼	Metric	Imperial	Metric	Imperial	Metric	Imperial
<b>SMALL</b> Max load per part Max panel weight Max panel width	6 kgs 12 kgs 4mm	13.2 lbs 26.4 lbs 5/32"	6 kgs 12 kgs 5mm	13.2 lbs 26.4 lbs 13/64"	6 kgs 12 kgs 4mm	13.2 lbs 26.4 lbs 5/32"
<b>MEDIUM</b> Max load per part Max panel weight Max panel width	8 kgs 16 kgs 7mm	17.6 lbs 35.2 lbs 9/32"	8 kgs 16 kgs 8mm	17.6 lbs 35.2 lbs 5/16"	8 kgs 16 kgs 7mm	17.6 lbs 35.2 lbs 9/32"
<b>LARGE</b> Max load per part Max panel weight Max panel width	10 kgs 20 kgs 10mm	22 lbs 44 lbs 3/8"	10 kgs 20 kgs 10mm	22 lbs 44 lbs 3/8"	10 kgs 20 kgs 10mm	22 lbs 44 lbs 3/8"
<b>XL</b> Max load per part Max panel weight Max panel width	10 kgs 20 kgs 12mm	22 lbs 44 lbs 15/32"	10 kgs 20 kgs 12mm	22 lbs 44 lbs 15/32"	10 kgs 20 kgs 12mm	22 lbs 44 lbs 15/32"

**IMPORTANT**

- Maximum load per multimount should not exceed the maximum load per B part.
- Maximum total load should not exceed the maximum panel weight in the B parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

**Installers must ensure that:**

- Any of the limits detailed above are not exceeded.
- A parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.