


multi•mount™

s t a n d o f f s y s t e m

Resin Range	Standard Sizes	Nominal Dimensions
Small	Medium	Large
<p>Also available in clear and white in the standard range and in numerous colours in the PT and SA ranges.</p>		

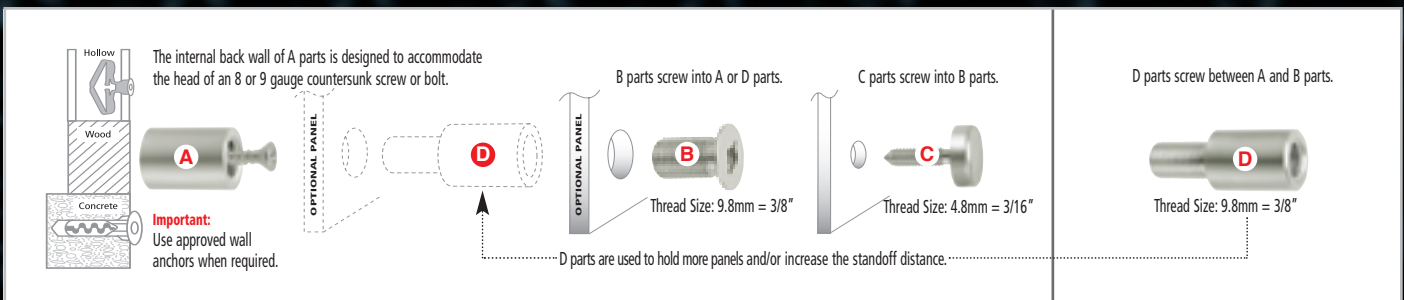

Standard Parts A B C	Maximum Loads and Widths				Optional Extra Parts D	
PART ▶	B PARTS		C PARTS		D PARTS	
SIZE ▼	Metric	Imperial	Metric	Imperial	Metric	Imperial
SMALL						
Max load per part	6 kgs	13.2 lbs	4 kgs	8.8 lbs	6 kgs	13.2 lbs
Max panel weight	12 kgs	26.4 lbs	8 kgs	17.6 lbs	12 kgs	26.4 lbs
Max panel width	4mm	5/32"	4mm	5/32"	4mm	5/32"
MEDIUM						
Max load per part	8 kgs	17.6 lbs	4 kgs	8.8 lbs	8 kgs	17.6 lbs
Max panel weight	16 kgs	35.2 lbs	8 kgs	17.6 lbs	16 kgs	35.2 lbs
Max panel width	7mm	9/32"	7mm	9/32"	7mm	9/32"
LARGE						
Max load per part	10 kgs	22 lbs	4 kgs	8.8 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	8 kgs	17.6 lbs	20 kgs	44 lbs
Max panel width	10mm	3/8"	10mm	3/8"	10mm	3/8"

IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B part.
- Maximum total load should not exceed the maximum panel weight in the B parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.